







Features

- Wide input range 180 ~ 528VAC
- Constant Voltage + Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming (dim-to-off); Timer dimming
- · Typical lifetime>50000 hours
- 5 years warranty

IP65 IP67 P [H c Type HL V

Applications

- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting


GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

HVG-65 series is a 65W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HVG-65 operates from $180 \sim 528 \text{VAC}$ and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HVG-65 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

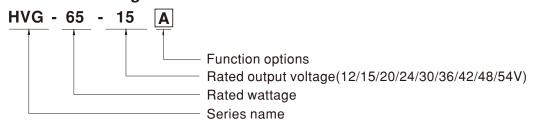

Type	IP Level	Function	Note
Α	IP65	Io and Vo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer & 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Built-in Smart timer dimming function by user request.	By request




SPECIFICATION

MODEL		HVG-65-12	HVG-65-15	HVG-65-20	HVG-65-24	HVG-65-30	HVG-65-36	HVG-65-42	HVG-65-48	HVG-65-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	RATED CURRENT	5A	4.3A	3.25A	2.71A	2.17A	1.81A	1.55A	1.36A	1.21A
	RATED POWER	60W	64.5W	65W	65W	65.1W	65.2W	65.1W	65.3W	65.3W
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p	300mVp-p
	== 0.1010= (200 p			осс р	осо гр р
	VOLTAGE ADJ. RANGE	Adjustable for A-Type only (via the built-in potentiometer) 10.8 ~ 13.5V 13.5 ~ 17V 17 ~ 22V 22 ~ 27V 27 ~ 33V 33 ~ 40V 38 ~ 46V 43 ~ 53V 49 ~ 58V								
OUTPUT		10.6 ~ 13.5 \(\) 13.5 ~ 17\(\) 17 ~ 22\(\) 22 ~ 27\(\) 21 ~ 33\(\) 35 ~ 40\(\) 36 ~ 46\(\) 43 ~ 53\(\) 49 ~ 58\(\) Adjustable for A/AB-Type only (via the built-in potentiometer)								
OUTPUT	CURRENT ADJ. RANGE	3 ~ 5A	2.58 ~ 4.3A	, ,	1.62 ~ 2.71A		1 08 ~ 1 814	0 93 ~ 1 55Δ	0.81 ~ 1.36A	0.72 ~ 1.21/
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
			±0.5%		±0.5%		±0.5%	±0.5%		±0.5%
	LINE REGULATION	±0.5%		±0.5%		±0.5%			±0.5%	
	LOAD REGULATION	±1.5%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	500ms, 80ms		-	/347VAC, 480	VAC				
	HOLD UP TIME (Typ.)	16ms / 347VAC 30ms / 480VAC								
	VOLTAGE RANGE Note.5	180 ~ 528VAC 254VDC ~ 747VDC								
		(Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)						0VAC @full load	t		
		(Please refer	to "POWER FA	CTOR (PF) CH	ARACTERISTI	C" section)				
INDIIT	TOTAL HARMONIC DISTORTION	THD< 20%(@) load≥60%/2	230VAC, 277V	AC, 347VAC; (@ load≥75%/	480VAC)			
INPUT	TOTAL HARMONIC DISTORTION	(Please refer	to "TOTAL HA	RMONIC DIS	TORTION (TH	D)" section)				
	EFFICIENCY (Typ.)	86.5%	87.5%	88.5%	89%	89%	89.5%	89.5%	90%	90%
	AC CURRENT (Typ.)	0.22A / 347V/	AC 0.18A	/ 480VAC						
	INRUSH CURRENT (Typ.)	COLD START	25A(twidth=420)μs measured a	t 50% Ipeak) at 4	480VAC; Per N	EMA 410			
	MAX. No. of PSUs on 16A	COLD START 25A(twidth=420µs measured at 50% lpeak) at 480VAC; Per NEMA 410								
	CIRCUIT BREAKER	12 units (circ	uit breaker of ty	ype B) / 20 unit	s (circuit breal	(er of type C) a	t 480VAC			
	LEAKAGE CURRENT	<0.75mA / 48	0VAC							
		95 ~ 108%								
	OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT				tically after fau					
PROTECTION	SHOKT CIRCUIT	14.4 ~ 16.8V		23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 60V	59 ~ 65V
	OVER VOLTAGE				or re-power on		71 700	47 001	04 000	00 001
	OVER TEMPERATURE				tically after ten		c down			
	OVER TEMPERATURE									
	WORKING TEMP.	Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
	MAX. CASE TEMP.	Tcase=+80°C								
ENVIRONMENT	WORKING HUMIDITY		non-condensi	ng						
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,								
	TEMP. COEFFICIENT	±0.03%/℃(0 ~ 60°C)							
	VIBRATION	10 ~ 500Hz, 5	G 12min./1cyd	cle, period for	72min. each al	ong X, Y, Z axe	S			
	SAFETY STANDARDS	UL8750(type'	'HL"), CSA C22	2.2 No. 250.0-1	13, EAC TP TC	004, IP65 or IF	P67 approved			
SAFETY & ISOLATION RESISTANCE		I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC								
		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
EMC	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 60%); EN61000-3-3, FCC Part 15 Subpart B, EAC TP TC 020								
	EMC IMMUNITY					, ,	rge immunity Li			
OTHERS	MTBF	2170.5K hrs			ellcore); 208.0		MIL-HDBK-21	_	,,	
	DIMENSION	189*61.5*36.			, , 200.	2				
	PACKING		s/14.9Kg/0.890	CUFT						
	All parameters NOT speciall	0. 1			ut. rated load a	and 25°C of an	nbient tempera	ture.		
NOTE	Ripple & noise are measure Tolerance: includes set up t Please refer to "DRIVING M Please refer to "STATIC CH Length of set up time is mer The driver is considered as complete installation, the fine (as available on https://www This series meets the typica Please refer to the warranty The ambient temperature of For any application note are https://www.meanwell.com/ For A/AB type need to con	olerance, line IETHODS OF ARACTERIST saured at first of a component to all equipment in meanwell.com life expectant statement on delerating of 3.5° d IP water pro Upload/PDF/L	regulation and LED MODULE ICT MODULE ICT Sections for coold start. Turn hat will be operanufacturers of 50,000 MEAN WELL! C/1000m with of function ins ED_EN.pdf sing to comply	load regulatio: ". " or details. Ing ON/OFF the reated in comb must re-qualify. IEMI_statemer hours of operas s website at ht fanless mode tallation cautio y with Type HL	n. he driver may ination with fin rEMC Directivnt_en.pdf) tition when Tca.tp://www.mear is and of 5°C/r, please refer. application.	lead to increas al equipment. e on the comp se, particularly well.com 1000m with far our user man	se of the set up Since EMC pe plete installation (to) point (or T	o time. rformance will n again. MP, per DLC) perating altituding.	be affected by , is about $75^{\circ}\!$	or less.




■ Block Diagram

PFC fosc : 65KHz PWM fosc : 65KHz

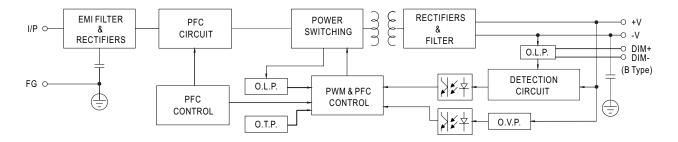

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.



Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 0 ~ 10VDC




"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


O Applying additive resistance:



"DO NOT connect "DIM- to -V"








Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.


2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



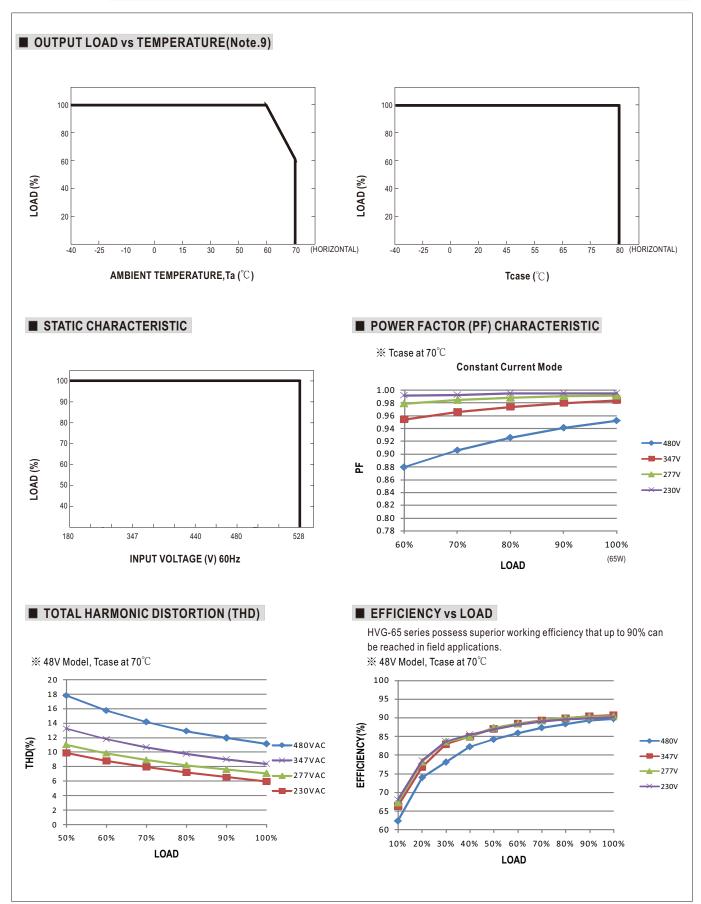





■ LIFE TIME

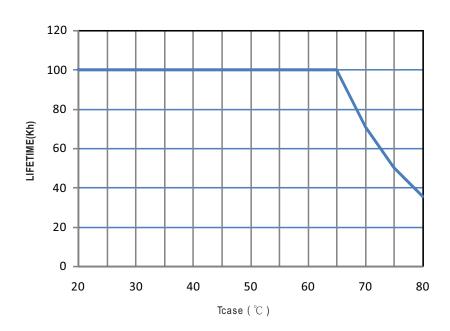



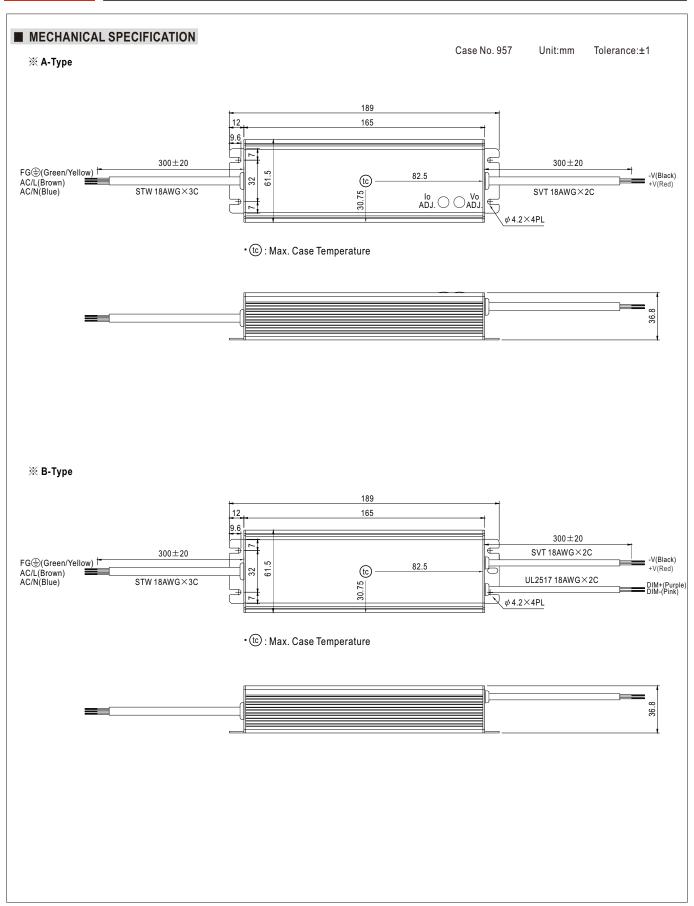



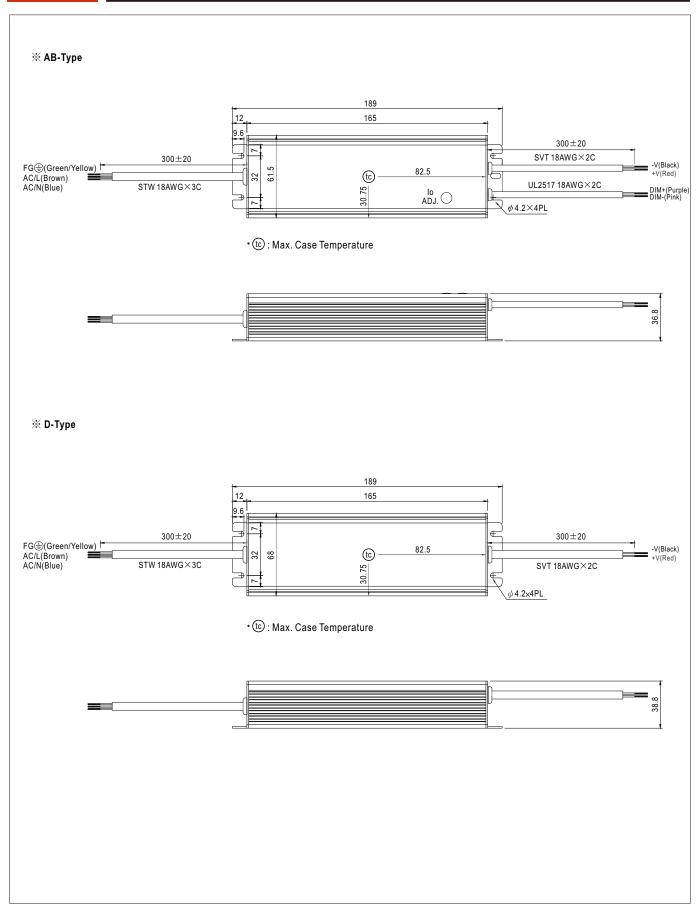




■ WATERPROOF CONNECTION


X Waterproof connector

Waterproof connector can be assembled on the output cable of HVG-65 to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)			
M12	000	©©		
IVITZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	00		
INITO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		



※ Cable Joiner

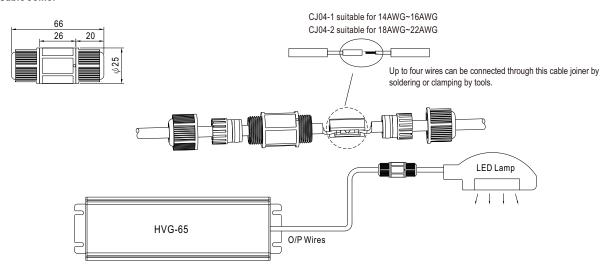

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html