



**CB EAC CE VI**  
EN62368-1 IEC62368-1 TPTC004

**Energy Verified**  
Rendement  
Énergétique Vérifié



## ■ Features

- **Global certificates**
- Universal AC input / Full range
- 2 pole EURO plug, Class II power unit
- No load power consumption < 0.075W
- **Energy efficiency Level VI**
- Comply with EU ErP and CoC Version 5
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Pass LPS
- -30~+70°C wide range working temperature
- LED indicator for power on
- **Various DC plug quick adapter accessory available**  
(Plug kit sold sperately, please refer to : [https://www.meanwell.com/upload/pdf/DC\\_plug.pdf](https://www.meanwell.com/upload/pdf/DC_plug.pdf) )
- 3 years warranty

## ■ Applications

- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments

## ■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## ■ Description

GST18E is a highly reliable, 18W wall-mounted style single-output green adaptor series. This product is a class II power unit (no FG), equipped with a 2-Pin standard European AC power plug, adopting the input range from 85VAC to 264VAC. The entire series supplies different models with output voltages ranging between 5VDC and 48VDC that can satisfy the demands for various types of consumer electronic devices. With the efficiency up to 89% and the extremely low no-load power consumption below 0.075W, GST18E is compliant with EU ErP, and Code of Conduct(CoC) Version 5 . The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case, providing the double insulation that effectively prevents electrical shock. GST18E is certified for the international safety regulations.

## ■ Model Encoding

**GST 18 E 05 -P1J**

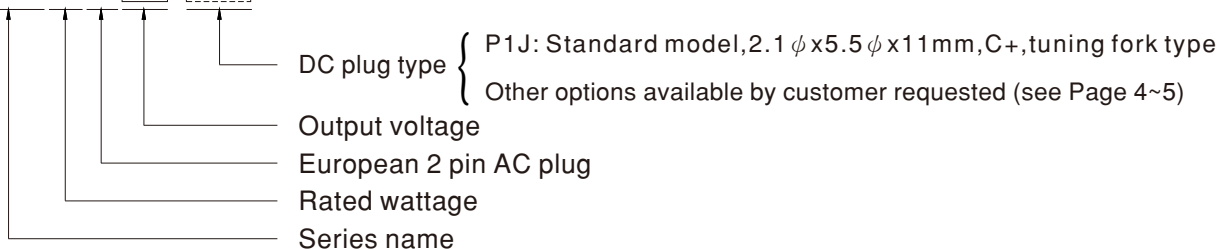





**SPECIFICATION**

| ORDER NO.                   | GST18E05-P1J   | GST18E07-P1J  | GST18E09-P1J                    | GST18E12-P1J  | GST18E15-P1J | GST18E18-P1J | GST18E24-P1J   | GST18E28-P1J                           | GST18E48-P1J      |            |  |
|-----------------------------|--|---|---------------------------------|---------------|--------------|--------------|--|--|-------------------|------------|--|
| OUTPUT                      | SAFETY MODEL NO.   | GST18E05  | GST18E07                        | GST18E09      | GST18E12     | GST18E15     | GST18E18   | GST18E24                               | GST18E28          | GST18E48   |  |
|                             | DC VOLTAGE <span style="float:right">Note.2</span>   | 5V  | 7.5V                            | 9V            | 12V          | 15V          | 18V  | 24V                                    | 28V               | 48V        |  |
|                             | RATED CURRENT  | 3.0A  | 2.0A                            | 2.0A          | 1.50A        | 1.20A        | 1.0A   | 0.75A                                  | 0.64A             | 0.375A     |  |
|                             | CURRENT RANGE  | 0 ~ 3.0A  | 0 ~ 2.0A                        | 0 ~ 2.0A      | 0 ~ 1.50A    | 0 ~ 1.20A    | 0 ~ 1.0A   | 0 ~ 0.75A                              | 0 ~ 0.64A         | 0 ~ 0.375A |  |
|                             | RATED POWER (max.)   | 15W   | 15W                             | 18W           | 18W          | 18W          | 18W  | 18W                                    | 18W               | 18W        |  |
|                             | RIPPLE & NOISE (max.) <span style="float:right">Note.3</span>  | 80mVp-p   | 80mVp-p                         | 80mVp-p       | 80mVp-p      | 100mVp-p     | 150mVp-p   | 150mVp-p                               | 150mVp-p          | 150mVp-p   |  |
|                             | VOLTAGE TOLERANCE <span style="float:right">Note.4</span>  | ± 5.0%  | ± 5.0%                          | ± 5.0%        | ± 3.0%       | ± 3.0%       | ± 3.0%   | ± 2.0%                                 | ± 2.0%            | ± 2.0%     |  |
|                             | LINE REGULATION <span style="float:right">Note.5</span>  | ± 1.0%  | ± 1.0%                          | ± 1.0%        | ± 1.0%       | ± 1.0%       | ± 1.0%   | ± 1.0%                                 | ± 1.0%            | ± 1.0%     |  |
|                             | LOAD REGULATION <span style="float:right">Note.6</span>  | ± 5.0%  | ± 5.0%                          | ± 5.0%        | ± 3.0%       | ± 3.0%       | ± 3.0%   | ± 2.0%                                 | ± 2.0%            | ± 2.0%     |  |
| SETUP, RISE, HOLD UP TIME   | 1000ms, 30ms, 50ms/230VAC      1500ms, 30ms, 15ms/115VAC at full load  |   |                                 |               |              |              |  |  |                   |            |  |
| INPUT                       | VOLTAGE RANGE <span style="float:right">Note.7</span>  | 85 ~ 264VAC   |                                 |               |              |              |  |  |                   |            |  |
|                             | FREQUENCY RANGE  | 47 ~ 63Hz   |                                 |               |              |              |  |  |                   |            |  |
|                             | EFFICIENCY (Typ.)  | 81%   | 85%                             | 85%           | 86%          | 87%          | 88%  | 88%                                    | 88.5%             | 89%        |  |
|                             | AC CURRENT   | 0.5A / 115VAC   |                                 | 0.3A / 230VAC |              |              |  |  |                   |            |  |
|                             | INRUSH CURRENT (max.)  | Cold start 35A / 115VAC   |                                 | 65A / 230VAC  |              |              |  |  |                   |            |  |
|                             | LEAKAGE CURRENT(max.)  | 0.25mA / 240VAC   |                                 |               |              |              |  |  |                   |            |  |
| PROTECTION                  | OVERLOAD   | 110 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |                                 |               |              |              |  |  |                   |            |  |
|                             | OVER VOLTAGE   | 110 ~ 140% rated output voltage<br>Protection type : Clamp by zener diode, output short                                 |                                 |               |              |              |  |  |                   |            |  |
|                             | WORKING TEMP.  | -30 ~ +70°C (Refer to "Derating Curve")   |                                 |               |              |              |  |  |                   |            |  |
| ENVIRONMENT                 | WORKING HUMIDITY   | 20% ~ 90% RH non-condensing   |                                 |               |              |              |  |  |                   |            |  |
|                             | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C, 10 ~ 95% RH non-condensing   |                                 |               |              |              |  |  |                   |            |  |
|                             | TEMP. COEFFICIENT  | ±0.03% / °C (0 ~ 50°C)  |                                 |               |              |              |  |  |                   |            |  |
|                             | VIBRATION  | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes   |                                 |               |              |              |  |  |                   |            |  |
| SAFETY & EMC<br>(Note. 9)   | SAFETY STANDARDS <span style="float:right">Note. 8</span>  | TUV EN62368-1, EAC TP TC 004 approved   |                                 |               |              |              |  |  |                   |            |  |
|                             | WITHSTAND VOLTAGE  | I/P-O/P:4242VDC   |                                 |               |              |              |  |  |                   |            |  |
|                             | ISOLATION RESISTANCE   | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH  |                                 |               |              |              |  |  |                   |            |  |
|                             | EMC EMISSION   | Parameter   | Standard                        |               |              |              |  |  | Test Level / Note |            |  |
|                             |  | Conducted emission  | EN55032(CISPR32), EAC TP TC 020 |               |              |              |  |  | Class B           |            |  |
|                             |  | Radiated emission   | EN55032(CISPR32), EAC TP TC 020 |               |              |              |  |  | Class B           |            |  |
|                             |  | Harmonic current  | EN61000-3-2                     |               |              |              |  |  | Class A           |            |  |
|                             |  | Voltage flicker   | EN61000-3-3                     |               |              |              |  |  | -----             |            |  |
|                             | EMC IMMUNITY   | BS EN/EN55035   |                                 |               |              |              |  |  |                   |            |  |
|                             |  | Parameter   | Standard                        |               |              |              |  |  | Test Level /Note  |            |  |
| ESD                         |  | EN61000-4-2   |                                 |               |              |              |  | Level 3, 8KV air; Level 2, 4KV contact |                   |            |  |
| RF field susceptibility     |  | EN61000-4-3   |                                 |               |              |              |  | Level 2, 3V/m                          |                   |            |  |
| EFT bursts                  |  | EN61000-4-4   |                                 |               |              |              |  | Level 2, 1KV                           |                   |            |  |
| Surge susceptibility        |  | EN61000-4-5   |                                 |               |              |              |  | Level 3, 1KV/Line-Line                 |                   |            |  |
| Conducted susceptibility    |  | EN61000-4-6   |                                 |               |              |              |  | Level 2, 3V                            |                   |            |  |
| Magnetic field immunity     |  | EN61000-4-8   |                                 |               |              |              |  | Level 2, 3A/m                          |                   |            |  |
| Voltage dips , interruption | EN61000-4-11   |   |                                 |               |              |              | > 95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods |  |                   |            |  |
| OTHERS                      | MTBF   | 3879.7K hrs min.    Telcordia SR-332 (Bellcore) ; 668.4K hrs min.    MIL-HDBK-217F (25°C)                               |                                 |               |              |              |  |  |                   |            |  |
|                             | DIMENSION  | 79*54*33mm (L*W*H)  |                                 |               |              |              |  |  |                   |            |  |
|                             | PACKING  | 202.5g; 60pcs/13.2Kg/1.15CUFT   |                                 |               |              |              |  |  |                   |            |  |
| CONNECTOR                   | PLUG   | See page 4~5 ; Other type available by customer requested   |                                 |               |              |              |  |  |                   |            |  |
|                             | CABLE  | See page 4~5 ; Other type available by customer requested   |                                 |               |              |              |  |  |                   |            |  |
| NOTE                        | <p>1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient.</p> <p>2.DC voltage: The output voltage set at point measure by plug terminal &amp; 50% load.</p> <p>3.Ripple &amp; noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1 μ F &amp; 47 μ F capacitor.</p> <p>4.Tolerance: includes set up tolerance, line regulation, load regulation.</p> <p>5.Line regulation is measured from low line to high line at rated load.</p> <p>6.Load regulation is measured from 10% to 100% rated load.</p> <p>7.Derating may be needed under low input voltage. Please check the derating curve for more details.</p> <p>8.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."<br/>(as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a>)</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p> |   |                                 |               |              |              |  |  |                   |            |  |

■ Derating Curve

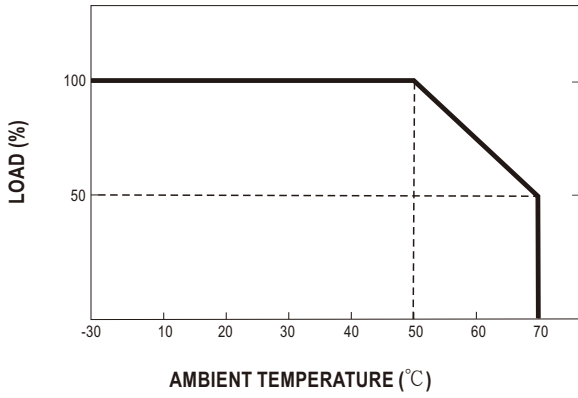


■ Static Characteristics

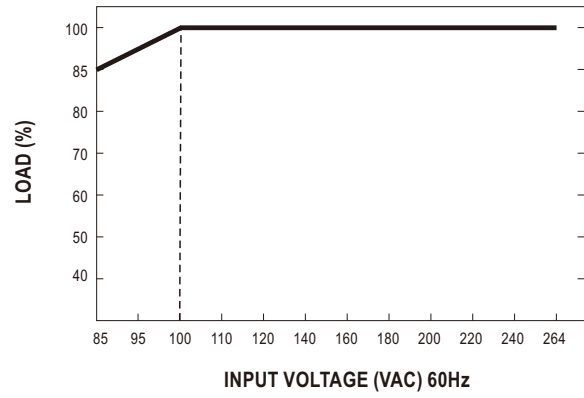

■ Mechanical Specification

(Unit: mm , tolerance  $\pm 1$ mm)

Case No. GSM36

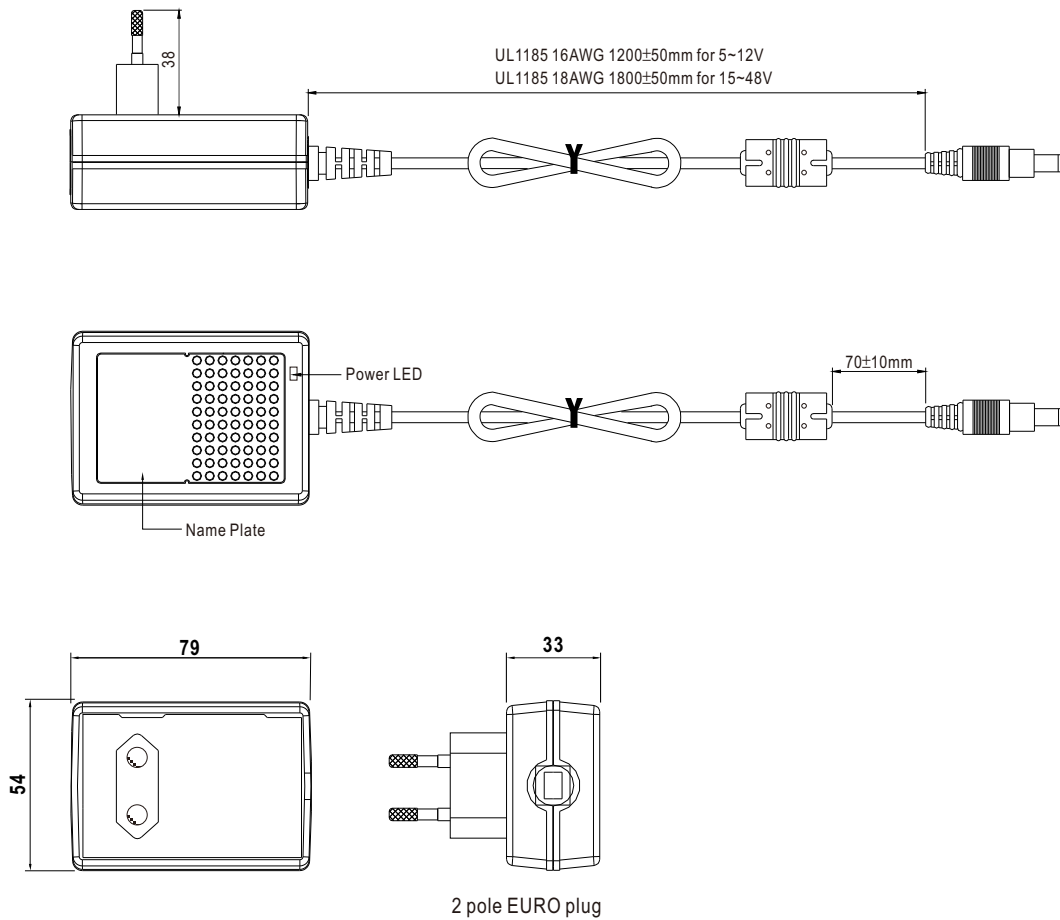

■ DC output plug

⊙ Standard plug: P1J

| P1J | Pin Assignment  |
|-----|-----------------|
|     |                 |
|     | Outside  Inside |

⊙ DC plug changeable through:

(1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)

(2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide : [https://www.meanwell.com/upload/pdf/DC\\_plug.pdf](https://www.meanwell.com/upload/pdf/DC_plug.pdf)

Example quick adapter accessory:



⊙ Optional DC plug: (Available in customized cable or quick adapter)

| Tuning Fork Style | Type No.            | A    | B    | C     | Quick Adapter Accessory                  |
|-------------------|---------------------|------|------|-------|--|
|                   |                     | OD   | ID   | L     |  |
|                   | P1I (Straight)      | 5.5  | 2.1  | 9.5   | Available<br>(Current rating: 7.5A max.) |
|                   | P1L (Straight)      | 5.5  | 2.5  | 9.5   |  |
|                   | P1M (Straight)      | 5.5  | 2.5  | 11.0  |  |
|                   | P1IR (Right-angled) | 5.5  | 2.1  | 9.5   |  |
|                   | P1JR (Right-angled) | 5.5  | 2.1  | 11.0  |  |
|                   | P1LR (Right-angled) | 5.5  | 2.5  | 9.5   |  |
|                   | P2I (Straight)      | 5.5  | 2.1  | 9.5   | None                                     |
|                   | P2J (Straight)      | 5.5  | 2.1  | 11.0  |  |
|                   | P2L (Straight)      | 5.5  | 2.5  | 9.5   |  |
|                   | P2M (Straight)      | 5.5  | 2.5  | 11.0  |  |
|                   | P2IR (Right-angled) | 5.5  | 2.1  | 9.5   |  |
|                   | P2JR (Right-angled) | 5.5  | 2.1  | 11.0  |  |
|                   | P2S(S761K)          | 5.53 | 2.03 | 12.06 | None                                     |
|                   | P2K(761K)           | 5.53 | 2.54 | 12.06 |  |
|                   | P2C(S760K)          | 5.53 | 2.03 | 9.52  |  |
|                   | P2D(760K)           | 5.53 | 2.54 | 9.52  |  |

| Min. Pin Style   | Type No.    | A              | B      | C  | Quick Adapter Accessory                |  |
|--|-------------|----------------|--------|--|--|--|
|  |             | OD             | ID     | L  |  |  |
|  | P3A         | 2.35           | 0.7    | 11.0                                     | Available<br>(Current rating: 5A max.) |  |
|  | P3B         | 4.0            | 1.7    | 11.0                                     |  |  |
|  | P3C         | 4.75           | 1.7    | 11.0                                     |  |  |
| Center Pin Style   | Type No.    | A              | B      | C  | D                                      | Available<br>(Current rating: 7.5A max.) |
|  | P4A         | 5.5            | 3.4    | 11.0                                     | 1.0                                    |  |
|  | P4B         | 6.5            | 4.4    | 11.0                                     | 1.4                                    |  |
|  | P4C         | 7.4            | 5.1    | 11.0                                     | 0.6                                    |  |
| Min. DIN 3 Pin with Lock (male)  | Type No.    | Pin Assignment |        | Available<br>(Current rating: 7.5A max.) |  |  |
|  | R6B         | PIN No.        | Output |  |  |  |
|  |             | 1              | +Vo    |  |  |  |
|  |             | 2              | -Vo    |  |  |  |
| 3  | +Vo         |                |        |  |  |  |
| Min. DIN 4 Pin with Lock (male)  | Type No.    | Pin Assignment |        | Available<br>(Current rating: 7.5A max.) |  |  |
|  | R7B         | PIN No.        | Output |  |  |  |
|  |             | 1              | +Vo    |  |  |  |
|  |             | 2              | -Vo    |  |  |  |
|  |             | 3              | -Vo    |  |  |  |
| 4  | +Vo         |                |        |  |  |  |
| Min. DIN 4 Pin with Lock (female)  | Type No.    | Pin Assignment |        | None                                     |  |  |
|  | R7BF        | PIN No.        | Output |  |  |  |
|  |             | 1              | +Vo    |  |  |  |
|  |             | 2              | -Vo    |  |  |  |
|  |             | 3              | -Vo    |  |  |  |
| 4  | +Vo         |                |        |  |  |  |
| DIN 5 Pin (male)   | Type No.    | Pin Assignment |        | Available<br>(Current rating: 7.5A max.) |  |  |
|  | R1B         | PIN No.        | Output |  |  |  |
|  |             | 1              | -Vo    |  |  |  |
|  |             | 2              | -Vo    |  |  |  |
|  |             | 3              | +Vo    |  |  |  |
|  |             | 4              | -Vo    |  |  |  |
| 5  | +Vo         |                |        |  |  |  |
| Stripped and tinned leads  | Type No.    | Pin Assignment |        | None                                     |  |  |
| <p>Length of Land L1 by request<br/>(MW's standard length, L: 25 mm, L1: 5 mm)<br/>( NOTE: The wire color is for reference only, please refer to the actual product)</p> | by customer | PIN No.        | Output |  |  |  |
|  |             | 1              | +Vo    |  |  |  |
| 2  | -Vo         |                |        |  |  |  |

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>