

GSM120A series




• 3 years warranty

Description

GSM120A is a highly reliable, 120W desktop style single-output green medical adaptor series. This product is equipped with a 3-pin (with FG) standard IEC320-C14 power plug, adopting the input range from 80VAC to 264VAC. The entire series supplies different output voltages between 12VDC and 48VDC that can satisfy the demands for various kinds of medical electrical devices. The circuitry design meets the international medical standards (2*MOPP), having an ultra low leakage current (<100 μ A), fitting the medical devices in direct electrical contact with the patients.

With the efficiency up to 91.5% and the extremely low no-load power consumption below 0.15W, GSM120A is compliant with USA EISA 2007/DoE, Canada NRCan, Australia and New Zealand MEPS, EU ErP, and meet Code of Conduct (CoC) Version 5. The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case. GSM120A is approved with the international medical safety certificates.

Model Encoding GSM120A 12-R7B






GSM120A series

SPECIFICATION

ORDER NO.		GSM120A12-R7B	GSM120A15-R7	'B GSM120A20-R7B	GSM120A2	4-R7B	GSM120A48-R7B					
	SAFETY MODEL NO.	GSM120A12	GSM120A15	GSM120A20	GSM120A24	4	GSM120A48					
OUTPUT	DC VOLTAGE Note.2	12V	15V	20V	24V		48V					
	RATED CURRENT	8.5A	7A	6A	5A		2.5A					
	CURRENT RANGE	0~8.5A	0~7A	0~6A	0~5A		0~2.5A					
	RATED POWER (max.)	102W	105W	120W	120W		120W					
	. ,	-										
	RIPPLE & NOISE (max.) Note.3		120mVp-p	180mVp-p	180mVp-p		200mVp-p					
	VOLTAGE TOLERANCE Note.4		±5.0%	±5.0%	±3.0%		±2.5%					
	LINE REGULATION Note.5		±1.0%	±1.0%	±1.0%		±1.0%					
	LOAD REGULATION	±5.0%	±5.0%	±4.0%	±3.0%		±2.5%					
	SETUP, RISE TIME Note.6	1500ms, 30ms / 230VAC 2000ms, 30ms / 115VAC at full load										
	HOLD UP TIME (Typ.)	40ms / 230VAC 24ms / 115VAC at full load										
INPUT	VOLTAGE RANGE Note.7	280 ~ 264VAC										
	FREQUENCY RANGE	47 ~ 63Hz										
	POWER FACTOR (Typ.)	PF>0.93 / 230VAC PF>0.97 / 115VAC at full load										
	EFFICIENCY (Typ.)	88%	8% 89% 90% 91.5'									
	AC CURRENT (Typ.)	1.4A / 115VAC 0.7A / 230VAC										
	INRUSH CURRENT (Typ.)	Cold start 35A / 115VAC 70A / 230VAC										
	LEAKAGE CURRENT(max.)	Earth leakage current < 115 μA/264VAC , Touch current <100 μA/264VAC										
PROTECTION												
	OVERLOAD	105 ~ 160% rated output power										
		Protection type : Hiccup mode, recovers automatically after fault condition is removed										
	OVER VOLTAGE	105 ~ 135% rated output voltage Protection type : Shut down o/p voltage, re-power on to recover										
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover										
ENVIRONMENT	WORKING TEMP.	-30 ~ +70 $^\circ \rm C$ (Refer to "Derating Curve")										
	WORKING HUMIDITY	20% ~ 90% RH non-condensing										
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing										
	TEMP. COEFFICIENT	±0.03% /°C (0~40°C)										
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes										
	OPERATING ALTITUDE Note.8											
		IEC 60601-1:2005+A1,TUV BS EN/ EN 60601-1:2006+A1+A12+A2,ANSI/AAMI ES60601-1:2005/A2:2021,										
	SAFETY STANDARDS	CAN/CSA C22.2 No. 60601-1:2014+A2,EAC TP TC 004 approved										
	ISOLATION LEVEL	Primary-Secondary: 2xMOPP, Primary-Earth: 1xMOPP										
	WITHSTAND VOLTAGE Note. 9											
SAFETY & EMC (Note. 10)	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH										
		Parameter		andard	Te	est Level / No	ite					
				EN/EN55011 (CISPR11), FCC F	PART 15 /							
		Conducted emission	CIS		Class B							
	EMC EMISSION	Radiated emission	EN/EN55011 (CISPR11), FCC F									
		CIS		CISPR22, CAN ICES-3(B)/NMB-3(B)								
		Harmonic current BS EN/EN61000-3-2				Class A						
		Voltage flicker	BS	EN/EN61000-3-3								
		BS EN/EN60601-1-2, BS EN/EN61204-3										
	EMC IMMUNITY	Parameter Standard			Те	Test Level / Note						
		ESD		EN/EN61000-4-2	Le	vel 4 15KV a	4, 15KV air ; Level 4, 8KV conta					
						Level 3, 10V/m(80MHz~2.7GHz)						
		RF field susceptibility BS EN/EN61000-4-3			Table 9, 9~28V/m(385MHz~5.78GH							
		EFT bursts	BS	EN/EN61000-4-4	Level 3, 2KV							
		Surge susceptibility		EN/EN61000-4-5	Level 3, 1KV/Line-		ne-line 2K\//Line_EG					
		Conducted susceptibili		EN/EN61000-4-6		Level 3, 10V						
				EN/EN61000-4-8								
		Magnetic field immunity	y 63	EIN/EIN01000-4-0		Level 4, 30A/m						
		Voltage dip, interruptio	n BS	EN/EN61000-4-11		100% dip 1 periods, 30% dip 25 period						
	NTDE											
OTHERS	MTBF	2413.9K hrs min. Telcordia SR-332 (Bellcore) ; 388.5K hrs min. MIL-HDBK-217F (25°C)										
	DIMENSION	167*67*35mm (L*W*H)										
		0.6Kg; 20pcs/13.0Kg/0.89CUFT										
ONNECTOR		See page 4~5 ; Other type available by customer requested										
CONNECTOR	CABLE	See page 4~5 ; Other ty	pe available by cus	stomer requested								
OTE	 DC voltage: The output volta Ripple & noise are measure Tolerance: includes set up to Line regulation is measured Length of set up time is measured Derating may be needed ur The ambient temperature do Optional for 1.5KVAC with E The power supply is consist 	age set at point measure d at 20MHz by using a ' olerance, line regulation, from low line to high line asured at first cold start. Ider low input voltages. F erating of 3.5°C/1000m v 3F rated. dered as an independent	by plug terminal & 12" twisted pair ten load regulation. e at rated load. Turning ON/OFF ti Pleas check the de vith fanless models t unit, but the final	& 50% load. minated with a 0.1 μ F & 47 μ he power supply may lead to i rating curve for more details. s and of 5°C/1000m with fan m equipment still need to re-conf	increase of the se nodels for operation firm that the whol	ng altitude hi le system cor						
CONNECTOR	 DC voltage: The output volta Ripple & noise are measured Tolerance: includes set up tr Line regulation is measured Length of set up time is mea Derating may be needed ur The ambient temperature de Optional for 1.5KVAC with E The power supply is considered (as available on https://www.supply.com 	0.6Kg; 20pcs/13.0Kg/0.89CUFT See page 4~5 ; Other type available by customer requested See page 4~5 ; Other type available by customer requested becified at 230VAC input, rated load, 25°C 70% RH ambient. put voltage set at point measure by plug terminal & 50% load. eesaured at 20MHz by using a 12" twisted pair terminated with a 0.1 μ F & 47 μ F capacitor. et up tolerance, line regulation, load regulation. asured from low line to high line at rated load. et is measured at first cold start. Turming ON/OFF the power supply may lead to increase of the set up time. ded under low input voltages. Pleas check the derating curve for more details. ature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(66)										



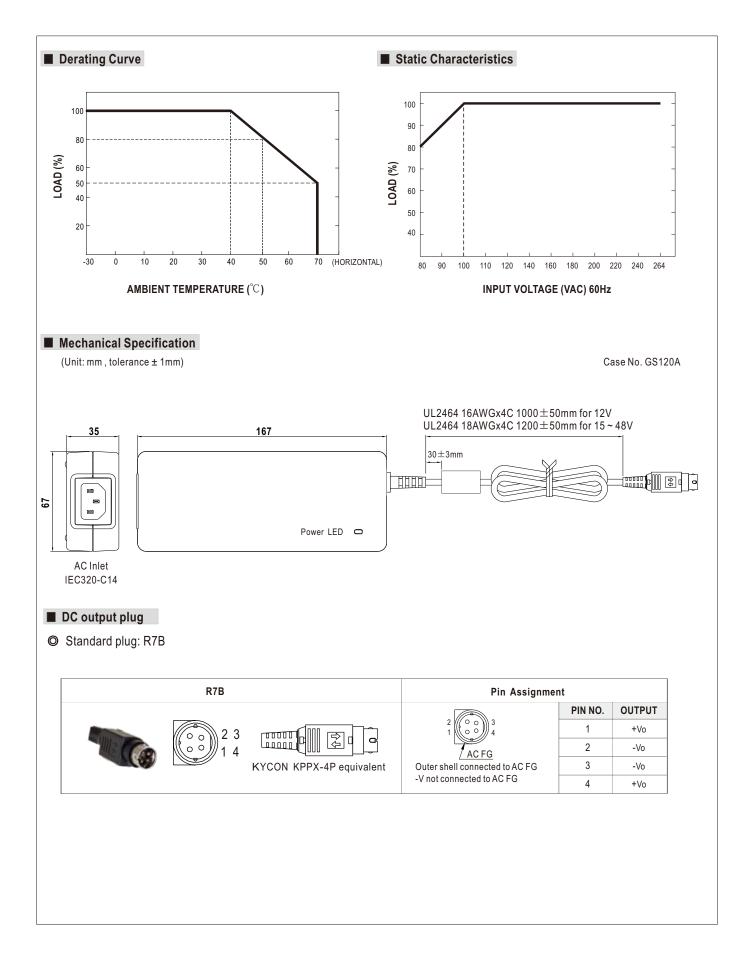



O DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide : <u>https://www.meanwell.com/upload/pdf/DC_plug.pdf</u>


Example quick adapter accessory:



Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	A	В	С	Quick Adapter	
	71	OD	ID	L	Accessory	
	P1J	5.5	2.1	11.0	Available for 15 ~ 48 (Current rating: 7.5A max	
(Straight)	P1M	5.5	2.5	11.0		
Min DIN 4 Din with Look (female)	Type No.	Pin Assignment				
Min. DIN 4 Pin with Lock (female)		PIN No.	PIN No. Output			
	R7BF	1	+Vo			
		2	-V	0	- None	
		3	-V	0	NOTE	
KYCON KPJX-CM-4S equivalent		4	+\	-		
DIN 5 Pin (male)	Type No.	Pin	Pin Assignment		_	
	туренчо.	PIN No.	Outp		None	
	R1B	1	-V	0		
		2	-V	0		
		3	+\	/o		
		4	-V	0		
		5	+\	/o		
NEUTRIK XLR NC4FX equivalent	Type No.	Pin Assignment				
		PIN No.	Outp	out	None	
	MIC4	1	+\	′o		
		2	+V	′o		
		3	-V			
•		4	-V	-		
MOLEX 39-01-2060 (4.2mm) equivalent	Type No.	Pin Assignment		-		
		PIN No.	Outp		None	
	C6P	1	+\/	-		
		2	+\			
		3	+\	-		
		4	-V			
FG not connected to output connector		5	-V	-		
·····		6	-V	0		



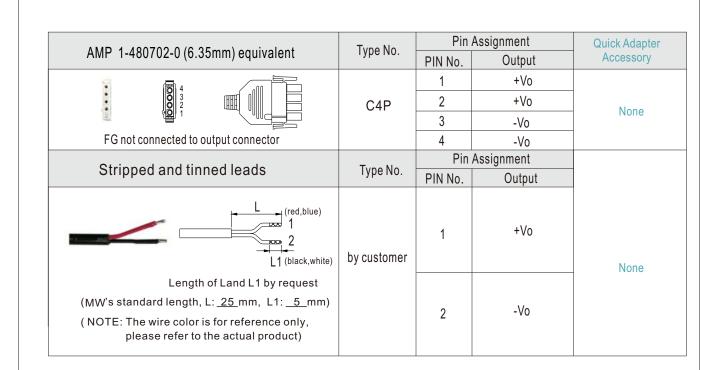

Installation Manual

Please refer to : http://www.meanwell.com/manual.html